
















ALUMINUM DOOR SYNTHETIC LINKAGE HANGING SLIDING ROLLER

TFRS50ASL





- Synthetic linkage aluminum sliding door rollers with a no-bottom-track design ensure safety and easy cleaning.
- Suitable for two-linkage and three-linkage aluminum sliding doors.
- Easy to install with adjustable door panel height after setup.
- Produced under strict quality control for lasting performance.
- Passes a 24-hour salt-spray test for corrosion resistance.

ITEM CODE	MODEL NO	DESCRIPTION	WEIGHT	WIDTH	THICKNESS	LENGTH
TF212062145	TFRS50ASL	2 DOOR	80 KG	820-1200MM	35-50MM	-
TF212062148	TFRSL01A	FITTINGS	-	-	-	-
TF212062123	TFURC40	UPPER RAIL COVER FOR 2 DOOR	-	-	-	4000MM


Accessories	2 linkage Doors	3 linkage Doors	Drawing
Linkage short guide roller	1	2	
Linkage long guide roller	1	2	
Damper with hanging part	2	2	
Top hanging plate	1	1	
Movable door down guider (L)	1	2	
Movable door down guider fixing plate (R)	1	2	
Belt supporting plate	1	2	
Top hanging plate	1	1	
Damper stopper component	2	2	
Top hanging roller	2	4	
Door stopper	2	4	
Aluminium frame down guider stopper	1	3	
3M Transmission belt 3 meter	1	2	
Fixed down roller	1	1	
Self tapping screw	6	10	

Single track diagram Connecting track diagram

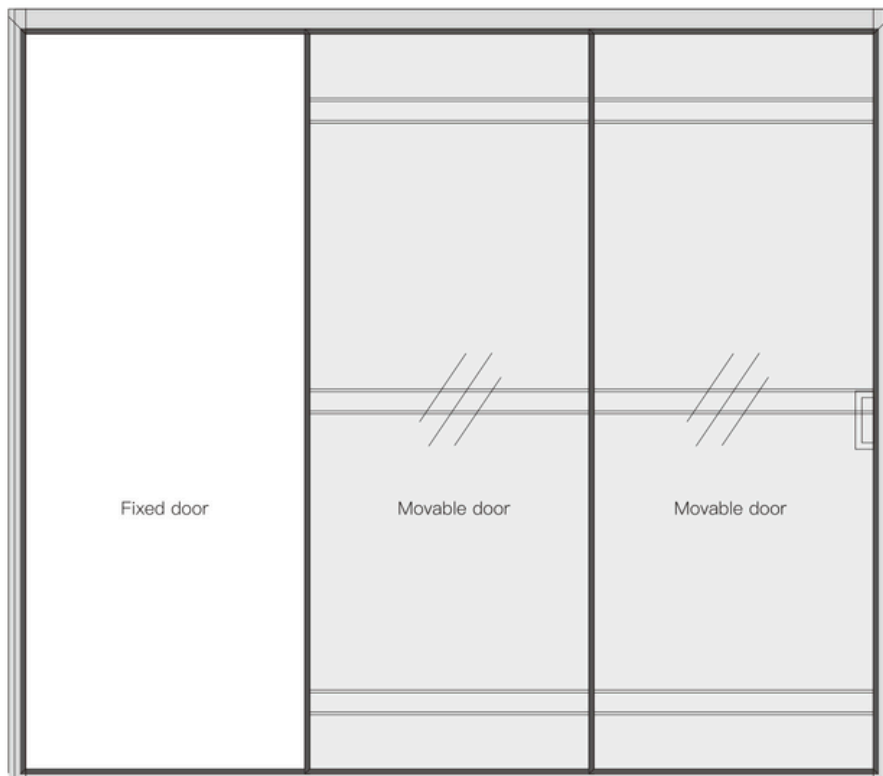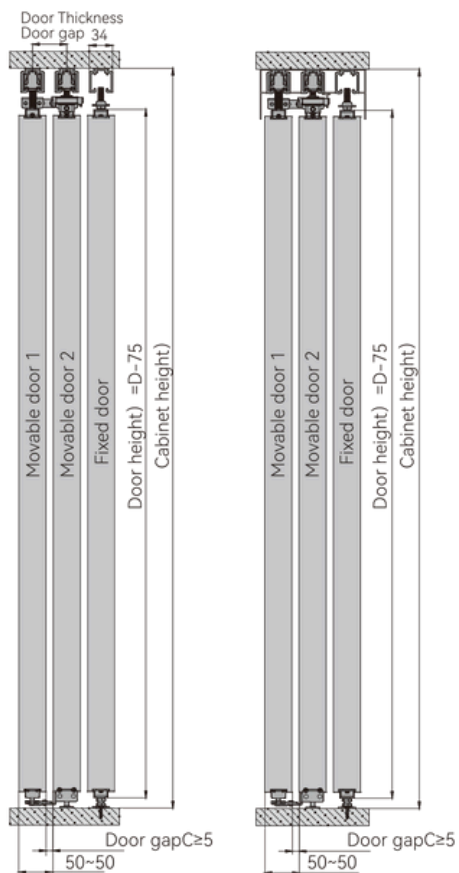

Door Thickness≤55-C

Top mounting rail

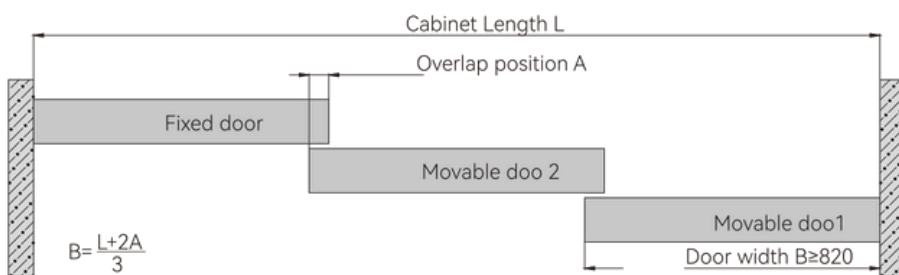

Hanging box size and door slotting requirement

