


TFHSSC80 TWO DOOR HANGING SLIDING SYSTEM SOFT CLOSE






Double soft close for 2 doors

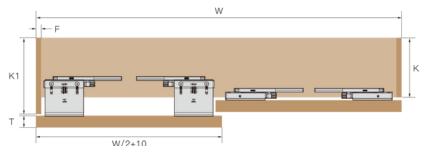


- K1=K+T+8
- T= Door Thickness
 - F= Thickness of side panel

- Double Side Soft Close
- Door Thickness: 16-46 mm
- Maximum Door Height: ≤ 2500 mm
- Door Weight Range: 20 kg 80 kg
- Door Width Range: 700 mm 1500 mm
- Clip on damper, dampers and parts are integrated;
- Special design of down runner, easy to install and uninstall
- Up and down sync damping, with excellent soft close performance
- Screw drivers can adjust from sides easily, with big adjustment
- Auto cleaning the rail, runners move smoothly and silently.



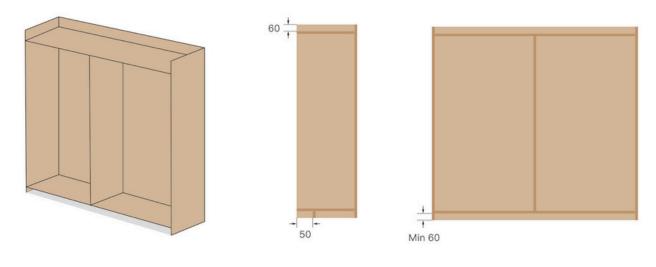

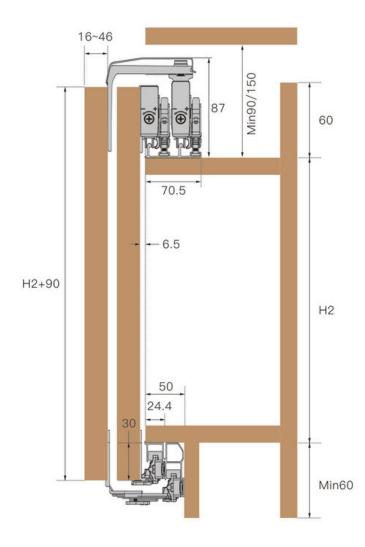




TFHSDSC80

THREE DOOR HANGING SLIDING SYSTEM DOUBLE SOFT CLOSE






Double soft close for 3 doors

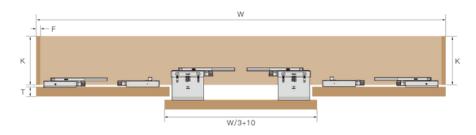


- K1=K+T+8
- T= Door Thickness
- F= Thickness of side panel

- Double Side Soft Close
- Door Thickness: 16-46 mm
- Maximum Door Height: ≤ 2500 mm
- Door Weight Range: 20 kg 80 kg
- Door Width Range: 700 mm 1500 mm
- Clip on damper, dampers and parts are integrated;
- Special design of down runner, easy to install and uninstall
- Up and down sync damping, with excellent soft close performance
- Screw drivers can adjust from sides easily, with big adjustment
- Auto cleaning the rail, runners move smoothly and silently.



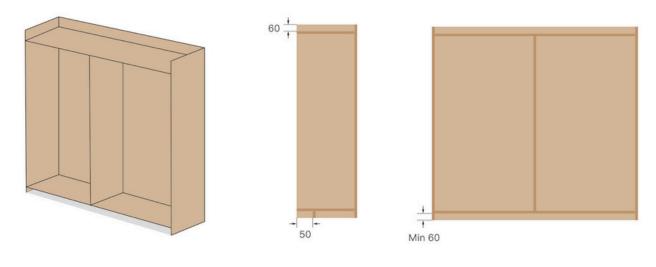

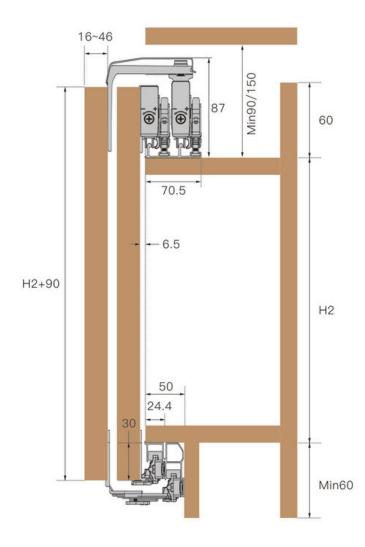




TFHSFSC80 THREE DOOR HANGING SLIDING SYSTEM FULL SOFT CLOSE






Full soft close for 3 doors

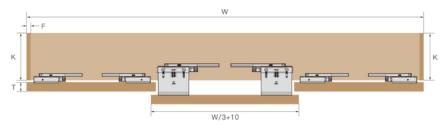


- K1=K+T+8
- T= Door Thickness
 - F= Thickness of side panel

- Double Side Soft Close
- Door Thickness: 16-46 mm
- Maximum Door Height: ≤ 2500 mm
- Door Weight Range: 20 kg 80 kg
- Door Width Range: 700 mm 1500 mm
- Clip on damper, dampers and parts are integrated;
- Special design of down runner, easy to install and uninstall
- Up and down sync damping, with excellent soft close performance
- Screw drivers can adjust from sides easily, with big adjustment
- Auto cleaning the rail, runners move smoothly and silently.



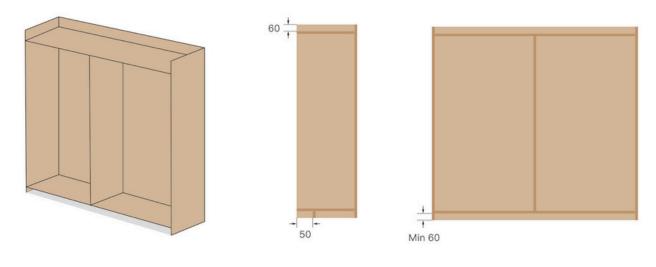

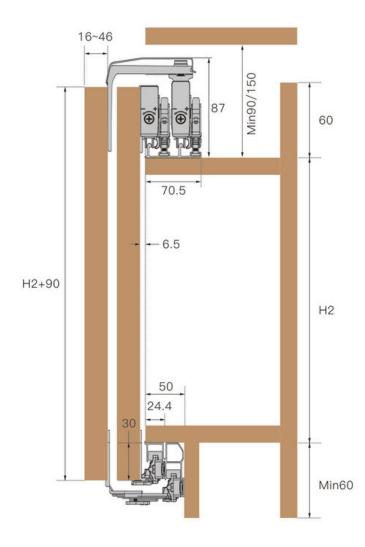



Accessories	Qty Single side soft close (2 doors) Double soft close (2 doors) Double soft close (3 doors) Full soft close (3 doors)				Drawing
Left up roller for outside door	1	1	1	1	
Right up roller for outside door	1	1	1	1	T. F. W
Left up roller for inside door	1	1	2	2	
Right up roller for inside door	1	1	2	2	The state of the s
Down roller for outside door	2	2	2	2	
Down roller for inside door	2	2	4	4	
Upper damper	2	4	4	6	1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1
Down damper	2	4	4	4	3
Stopper	2	4	4	4	3
Anti pinch device	1	1	2	2	
Anti-collide stopper	0	0	0	1	
ST4*16 ST4*16 Cross ressesed flat head tapping screws	40	40	60	60	-www.