

TFHSR100 - WOODEN DOUBLE SIDE SOFT CLOSE SLIDING DOOR SYSTEM



High precise roller, stable, smooth and silent sliding;

Double-side softclose

Easy installation and remove;

Apply to Wooden door (Single & Double), Aluminum frame door, Glass door


Door thickness: 35–50mm (wooden door), 35–50mm (aluminum frame door), 8–12mm (glass door)

ITEM CODE	MODEL NO	DESCRIPTION	WEIGHT	WIDTH	THICKNESS	LENGTH
TF212782192	TFHSR100	DOUBLE SOFT CLOSE SLIDING ROLLER	100 KG	820-1200 MM	35-50 MM	-
TF212062122	TFUR40	UPPER RAIL	-	-	-	4000MM
TF212062124	TFBR40	DOWN RAIL USE FOR WOODEN DOOR ONLY	-	-	-	4000MM


ACCESSORIES

HANGING PLATE	QTY	BOTTOM GUIDE		RUNNER (SINGLE SOFT CLOSE) & STOPPER	QTY	RUNNER (DOUBLE SOFT CLOSE) & STOPPER	QTY
	X2	 X1			X1		X2
	X2						
	X2	 X1	 X2				
	X2						
	X2						


INSTALLATION

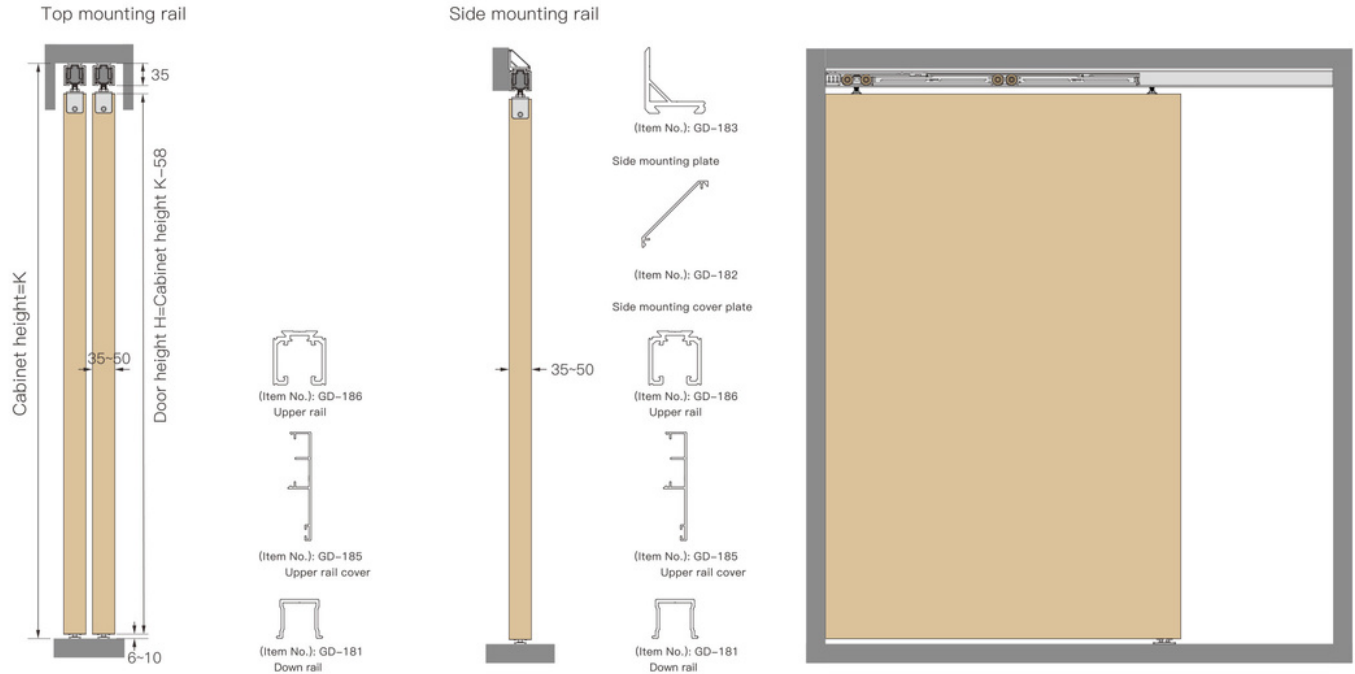


Door width X = Cabinet width W + 60
Rail length L = Door width X * 2 - 60

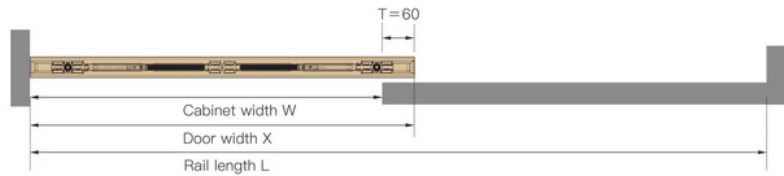


Door width X = Cabinet width W / doors qty + 30
Rail length L = Cabinet width W

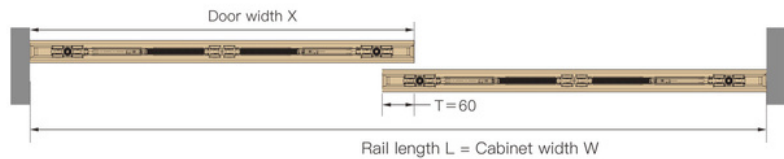


Door width X = Cabinet width W / doors qty + 60
Rail length L = Cabinet width W * 2 - 120

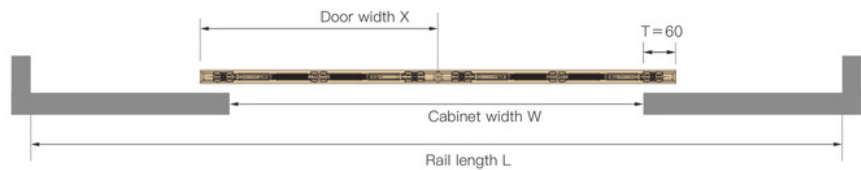


Door slotting

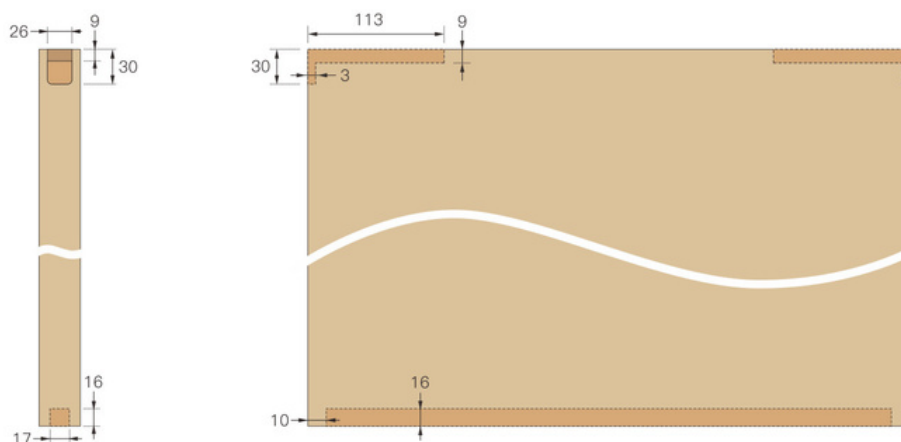

Install hanging plate and down rail

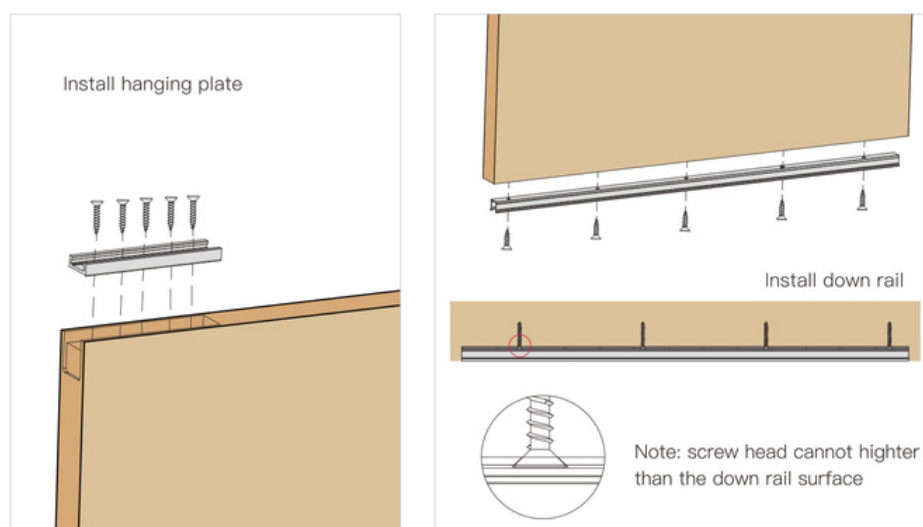

Stopper components and runners install into the rail

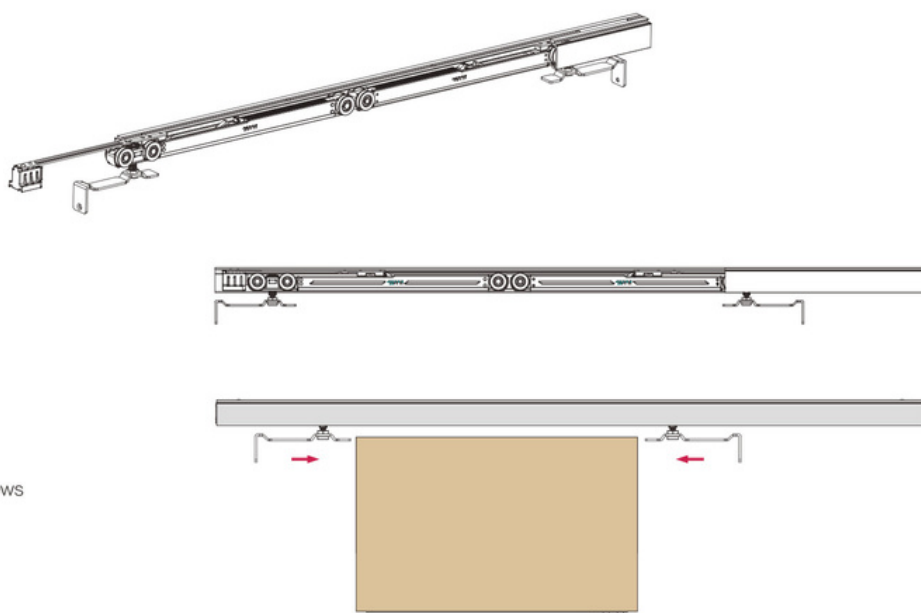

Install the insert into sleeve, lock and tighten with screws
Adjust door level to finish installation